

Morek EV charging products

Manage chargings the easy, effective, and versatile way

ev.morek.eu



Creating a better future for You

Morek eMobility AC chargers come in different versions and they are compatible with most electric car models.

Not just for private use - find a suitable model and service for an apartment building, parking lot, commercial building, etc.



One-man installation reduces the time and cost of installation

The installation process is simplified for maximum efficiency. The charger comes with a pre-set configuration and easy access to the setting shortens the setup time.



Different authorization modes support several use cases

Different modes of authentication support several use cases based on project requirements. The LCD display on the charger is easy to read and can be used in all locations - no translation to the local language is needed.



Built-in protection against grid overload

With both RCD and DC leakage built into the charging station, there is no need for additional rail space in the electrical cabinet, and the comprehensive detection capability for various residual fault currents is provided.



An agile e-mobility system, as you need it

Use it at home, apartment building, or work. Charge and share chargings. Perfect for public charging with "Powered by Vonktech" charge point & payment platform.



Easy-to-use public charging solution

Intuitive and easy—to—use tool for all EV drivers. Simplicity, speed, and clarity. No APP, no registration – everyone can charge right now, including aliens. Just scan the QR code, pay and charge.

Powered by Vonktech charge point & payment platform.

Manage chargings the easy, effective, and versatile way

Manage electric car charging locally or in various locations across Europe from one system.

Morek AC chargers can be installed either on a wall or pole which enables infrastructure planning for indoor or outdoor parking spaces more flexible.



Why Morek?

We, at Morek, strongly believe in creating a positive change in the electrical industry, helping our customers efficiently solve their issues, big and small, saving your money and time, creating a better future for you.



Through our long experience in the electrical industry, we know all the roadblocks our customers are facing day to day and how much time and effort is wasted every day to overcome them. Our goal is to eliminate these obstacles on the path to your success, so that you can devote your time to more important things.



Our tailor-made our product portfolio contains everything you need to manage the connections within an electrical cabinet, all in one place as a complete solution, so that you don't have to waste time on searching for required products from tens of different suppliers.



We offer smart and innovative technical solutions that often resolve complex technical issues in a simple and elegant way, with products that can save valuable space in the enclosure or replace more expensive products while improving technical functionality.



ElecZap provides many tools to simplify your everyday business such as All of your suppliers, in one place, Easy overview of all your order documents, Project management and order status tracking, Standardized product data.



We provide our customers with a full technical database of our products, including ETIM format, along with product images and drawings, helping you integrate our solutions into your projects and systems.



We are dedicating our time and effort to solving your issues, simple and complex, technical and administrative. And of course, our products are of the highest quality. You can rely on that.

Not just for private use - find a suitable model and service for an apartment building, parking lot, commercial building, etc.

Smart charge (WiFi, LAN, and/or optional 4G)

Use it at a private house, apartment building, or work. Charge and share chargings. Perfect for public charging with Powered by Vonktech charge point & payment platform.

Plug & charge

For private use. No internet connection and smart features. Just plug & charge



11 kW network charger 3.8" LCD display, Type 2 plug



22 kW network charger 3.8" LCD display, Type 2 plug



22 kW network charger
3.8" LCD display, Type 2 socket



7,4 kW, Plug & Charge LED, Type 2 plug



22 kW, Plug & Charge

LED, Type 2 plug



Up to 22 kW, LED/display
Custom configuration



Morek eMobility AC chargers come in different versions and they are compatible with most electric car models.

Morek AC chargers can be installed either on a wall or pole which enables infrastructure planning for indoor or outdoor parking spaces more flexibly.

Manage chargings the easy, effective, and versatile way

- Intelligent 22kW charger suitable for every electric car
- With informative 3.8" LCD display and 5m cable
- Intelligent load management (DLM) capability
- Network connection via LAN or WiFi
- Ready to connect with background systems
- · Smart charging with an APP or RFID card
- Easy to install

The installation process is simplified for maximum efficiency. The charger comes with a preset configuration and easy access with the Morek EV Tool APP to reduce setup time.









Different authorization modes support several use cases.

Different modes of authentication support several use cases based on project requirements. The LCD display on the charger is easy to read and can be used in all locations - no translation to the local language is needed.

Built-in protection against grid overload.

With both RCD and DC leakage built into the charging station, there is no need for additional rail space in the electrical cabinet, and the comprehensive detection capability for various residual fault currents is provided.

- EV 11 kW network charger
- 3.8" LCD display
- WiFi, RFID
- 5m cable
- Type 2 connector

Product ID	MEV11DRNW5T2		
Charging mode	Level 2		
Connector type	Type 2 connector with 5m cable		
Charging control	Plug-and-Charge, Start/stop touch button,		
	RFID Card, Configuration BT APP, Web app		
Internet connection	Wi-Fi / LAN		
External communication	RS485		
IP protection	IP55		
Impact strength	IK08		
Display	LCD 3.8"		
LED indicator	No		
Communication protocol	OCPP integrated		
Background functions	OCPP 1.6, OCPP 1.6J		
Reports	Full OCPP support, upgradable		
Standard and CE certificate	CE, TUV and full OCPP support		
Leakage protection	TypeB (AC30mB + DC6mA)		
Mounting	Wall / Stand		
Stand / ground mount	Available, not included		
Cooling method	Natural Cooling		
Power network configuration	TN / TT -> (3P+N+PE), TN / TT -> (1P+N+PE)		
Efficiency	>99%		
Power meter	OCPP integrated		
AC power Input rating	3-phase 400V±20% / 1-phase 230V±20%		
Rated frequency	50/60 Hz		
Output current	32 A / 16 A		
Output power	11 kW/ 7.4 kW		
DLM function	Available, CT not included		
Storage temperature	-40 to 75°C ambient		
Operating temperature	-30 to 55°C ambient		
Operating humidity	Up to 95% non-condensing		
Altitude	≤2000m		
Electrical protection	Over/Under Voltage Protection, Over Load Protection, Short Circuit Protection, Earth Leakage Protection, Ground Protection, Over-temp Protection, Surge Protection		
Dimensions mm	455 (h) x260 (w) x150 (d)		
Weight kg	4,5		
Warranty	24 months		








- EV 22 kW network charger
- 3.8" LCD display
- WiFi, RFID
- 5m cable
- Type 2 connector

Charging mode Level 2 Connector type Type 2 connector with 5m cable Charging control "Plug-and-Charge, Start/stop touch button, RFID Card, Configuration BT APP, Web app Internet connection Wi-Fi / LAN External communication R5485 IP protection IP55 Impact strength IK08 Display LCD 3.8" LED indicator No Communication protocol OCPP integrated Background functions OCPP 1.6, OCPP 1.6J Reports Full OCPP support, upgradable Standard and CE certificate CE, TUV and full OCPP support Leakage protection TypeB (AC30mA + DC6mA) Mounting Wall / Stand Stand / ground mount Available, not included Cooling method Natural Cooling Power network configuration TN / TT → (3P+N+PE), TN / TT → (1P+N+PE) Efficiency >99% Power meter OCPP integrated AC power Input rating 3-phase 400V±20% / 1-phase 230V±20% Rated frequency 50/60 Hz Output current 32 A / 16 A Output power 22 kW / 11 kW / 7.4 kW DLM function Available, CT not included Storage temperature -40 to 75°C ambient Operating temperature -30 to 55°C ambient Operating humidity Up to 95% non-condensing Altitude ≤2000m Electrical protection Over/Under Voltage Protection, Over Load Protection, Short Circuit Protection, Earth Leakage Protection, Ground Protection, Over-temp Protection, Surge Protection Dimensions mm 455 (h) x260 (w) x150 (d) Weight kg 5,9 Warranty 24 months	Product ID	MEV22DREW5T2		
Charging control RFID Card, Configuration BT APP, Web app Internet connection External communication RS485 IP protection IP55 Impact strength IK08 Display LCD 3.8" LED indicator No Communication protocol Background functions CE, TUV and full OCPP support Leakage protection YupeB (AC30mA + DC6mA) Mounting Wall / Stand Stand / ground mount Cooling method Power network configuration Efficiency Power meter AC power Input rating Rated frequency Output current Output power 22 kW/ 11 kW/ 7.4 kW DLM function Available, CT not included Storage temperature Operating temperature Operating temperature Operating temperature Operating humidity Up to 95% non-condensing Altitude Electrical protection Dimensions mm 455 (h) x260 (w) x150 (d) Weight kg Fisca Full Ocapp Integration BT APP, Web app IV IAN EASS RA485 IP protection, Nerse Assarch IV IAN External configuration BT APP, Web app IV IAN EASS RA5485 IP protection, Nore Lage Protection, Over-temp Protection, Surge Protection Dimensions mm Velock in a part of the protection and protection, Over-temp Protection, Surge Protection Dimensions mm Velock as a part of the protection applies and protection and protection, Over-temp Protection, Surge Protection Dimensions mm Atsi (Na) Wi-Fi / LAN External APP, Web app Wi-Fi / LAN External APP, Web app INA RA485 IP protection applies and protection applies applies and protection applies appli	Charging mode	Level 2		
Internet connection Wi-Fi / LAN External communication RS485 IP protection IP55 Impact strength IK08 Display LCD 3.8" LED indicator No Communication protocol OCPP integrated Background functions OCPP 1.6, OCPP 1.6J Reports Full OCPP support, upgradable Standard and CE certificate CE, TUV and full OCPP support Leakage protection TypeB (AC30mA + DC6mA) Mounting Wall / Stand Stand / ground mount Available, not included Cooling method Natural Cooling Power network configuration TN / TT → (3P+N+PE), TN / TT → (1P+N+PE) Efficiency >99% Power meter OCPP integrated AC power Input rating 3-phase 400∨±20% / 1-phase 230∨±20% Rated frequency 50/60 Hz Output current 32 A / 16 A Output power 22 kW/ 11 kW/ 7.4 kW DLM function Available, CT not included Storage temperature -40 to 75°C ambient Operating temperature -30 to 55°C ambient Operating humidity Up to 95% non-condensing Altitude ≤2000m Electrical protection Over/Under Voltage Protection, Over Load Protection, Short Circuit Protection, Earth Leakage Protection, Ground Protection, Over-temp Protection, Surge Protection Dimensions mm 455 (h) x260 (w) x150 (d) Weight kg 5,9	Connector type	Type 2 connector with 5m cable		
Internet connection Wi-Fi / LAN External communication RS485 IP protection IP55 Impact strength IK08 Display LCD 3.8" LED indicator No Communication protocol OCPP integrated Background functions OCPP 1.6, OCPP 1.6J Reports Full OCPP support, upgradable Standard and CE certificate CE, TUV and full OCPP support Leakage protection TypeB (AC30mA + DC6mA) Mounting Wall / Stand Stand / ground mount Available, not included Cooling method Natural Cooling Power network configuration TN / TT -> (3P+N+PE), TN / TT -> (1P+N+PE) Efficiency >99% Power meter OCPP integrated AC power Input rating 3-phase 400V±20% / 1-phase 230V±20% Rated frequency 50/60 Hz Output current 32 A / 16 A Output power 22 kW/ 11 kW/ 7.4 kW DLM function Available, CT not included Storage temperature -40 to 75°C ambient Operating temperature -30 to 55°C ambient Operating humidity Up to 95% non-condensing Altitude ≤2000m Electrical protection Over/Under Voltage Protection,	Charging control	"Plug-and-Charge, Start/stop touch button,		
External communication RS485 IP protection IP55 Impact strength IK08 Display LCD 3.8" LED indicator No Communication protocol OCPP integrated Background functions OCPP 1.6, OCPP 1.6J Reports Full OCPP support, upgradable Standard and CE certificate CE, TUV and full OCPP support Leakage protection TypeB (AC30mA + DC6mA) Mounting Wall / Stand Stand / ground mount Available, not included Cooling method Natural Cooling Power network configuration TN / TT -> (3P+N+PE), TN / TT -> (1P+N+PE) Efficiency >99% Power meter OCPP integrated AC power Input rating 3-phase 400V±20% / 1-phase 230V±20% Rated frequency 50/60 Hz Output current 32 A / 16 A Output power 22 kW/ 11 kW/ 7.4 kW DLM function Available, CT not included Storage temperature -40 to 75°C ambient Operating temperature -30 to 55°C ambient Operating humidity Up to 95% non-condensing Altitude ≤2000m Electrical protection Over/Under Voltage Protection,		RFID Card, Configuration BT APP, Web app		
IP protection IP55 Impact strength IK08 Display LCD 3.8" LED indicator No Communication protocol OCPP integrated Background functions OCPP 1.6, OCPP 1.6J Reports Full OCPP support, upgradable Standard and CE certificate CE, TUV and full OCPP support Leakage protection TypeB (AC30mA + DC6mA) Mounting Wall / Stand Stand / ground mount Available, not included Cooling method Natural Cooling Power network configuration TN / TT → (3P+N+PE), TN / TT → (1P+N+PE) Efficiency >99% Power meter OCPP integrated AC power Input rating 3-phase 400V±20% / 1-phase 230V±20% Rated frequency 50/60 Hz Output current 32 A / 16 A Output power 22 kW/ 11 kW/ 7.4 kW DLM function Available, CT not included Storage temperature -40 to 75°C ambient Operating humidity Up to 95% non-condensing Altitude ≤2000m Electrical protection Over/Under Voltage Protection, Over Load Protection, Short Circuit Protection, Earth Leakage Protection, Ground Protection, Over-temp Protection, Surge Protection Dimensions mm 455 (h) x260 (w) x150 (d) Weight kg 5,9	Internet connection	Wi-Fi / LAN		
Impact strength IK08 Display LCD 3.8" LED indicator No Communication protocol OCPP integrated Background functions OCPP 1.6, OCPP 1.6J Reports Full OCPP support, upgradable Standard and CE certificate CE, TUV and full OCPP support Leakage protection TypeB (AC30mA + DC6mA) Mounting Wall / Stand Stand / ground mount Available, not included Cooling method Natural Cooling Power network configuration TN / TT -> (3P+N+PE), TN / TT -> (1P+N+PE) Efficiency >99% Power meter OCPP integrated AC power Input rating 3-phase 400V±20% / 1-phase 230V±20% Rated frequency 50/60 Hz Output current 32 A / 16 A Output power 22 kW/ 11 kW/ 7.4 kW DLM function Available, CT not included Storage temperature -40 to 75°C ambient Operating temperature -30 to 55°C ambient Operating humidity Up to 95% non-condensing Altitude ≤2000m Electrical protection Over/Under Voltage Protection, Short C	External communication	RS485		
Display LED indicator No Communication protocol Background functions COPP 1.6, OCPP 1.6J Reports Full OCPP support, upgradable Standard and CE certificate Leakage protection Mounting Wall / Stand Stand / ground mount Cooling method Power network configuration Efficiency Power meter AC power Input rating Rated frequency Output current Output power DLM function Storage temperature Operating humidity Altitude Electrical protection Dimensions mm 455 (h) x260 (w) x150 (d) Weight kg Stand / GCPP 1.6J OCPP integrated Natural Cooling TN / TT → (3P+N+PE), TN / TT → (1P+N+PE) (TP+N+PE) Standard and CE certificate CE, TUV and full OCPP support TypeB (AC30mA + DC6mA) Natural Cooling TN / TT → (3P+N+PE), TN / TT → (1P+N+PE) Standard and CE certificate CE, TUV and full OCPP support TypeB (AC30mA + DC6mA) Natural Cooling TN / TT → (3P+N+PE), TN / TT → (1P+N+PE) Standard and CE certificate CE, TUV and full OCPP support TypeB (AC30mA + DC6mA) Natural Cooling TN / TT → (3P+N+PE), TN / TT → (1P+N+PE) Standard and CE certificate CE, TUV and full OCPP support TypeB (AC30mA + DC6mA) Natural Cooling TN / TT → (3P+N+PE), TN / TT → (1P+N+PE) Standard and CE certificate CE, TUV and full OCPP support TypeB (AC30mA + DC6mA) Natural Cooling TN / TT → (3P+N+PE), TN / TT → (1P+N+PE) To / TT → (3P+N+PE), TN / TT → (1P+N+PE) To / TT → (3P+N+PE), TN / TT → (1P+N+PE) To / TT → (3P+N+PE), TN / TT → (1P+N+PE) To / TT → (3P+N+PE), TN / TT → (3P+N+PE), TN / TT → (1P+N+PE) To / TT → (3P+N+PE), TN / TT → (3P+N+PE),	IP protection	IP55		
LED indicator Communication protocol Background functions OCPP 1.6, OCPP 1.6J Reports Full OCPP support, upgradable Standard and CE certificate CE, TUV and full OCPP support Leakage protection Mounting Wall / Stand Stand / ground mount Cooling method Natural Cooling Power network configuration Efficiency Power meter OCPP integrated AC power Input rating Rated frequency Output current 32 A / 16 A Output power DLM function Storage temperature Operating humidity Altitude Electrical protection Dimensions mm 455 (h) x260 (w) x150 (d) Weight kg Stand / OCPP 1.6J OCPP integrated AC power Input rating Available, not included Natural Cooling TN / TT -> (3P+N+PE), TN / TT -> (1P+N+PE) TypeB (AC30mA + DC6mA) Weight kg OCPP integrated AVailable, not included Natural Cooling TN / TT -> (3P+N+PE), TN / TT -> (1P+N+PE) TypeB (AC30mA + DC6mA) Weight kg OCPP integrated Available, not included TypeB (AC30mA + DC6mA) Natural Cooling Typ	Impact strength	IK08		
Communication protocol Background functions OCPP 1.6, OCPP 1.6J Reports Full OCPP support, upgradable Standard and CE certificate Leakage protection Mounting Wall / Stand Stand / ground mount Cooling method Power network configuration Efficiency Power meter AC power Input rating Rated frequency Output current 32 A / 16 A Output power 22 kW/ 11 kW/ 7.4 kW DLM function Storage temperature Operating humidity Altitude Electrical protection Dimensions mm 455 (h) x260 (w) x150 (d) Weight kg Stand / GCPP 1.6J ACPP 1.6J ACP 1.6J	Display	LCD 3.8"		
Background functions Reports Full OCPP support, upgradable Standard and CE certificate CE, TUV and full OCPP support Leakage protection Mounting Wall / Stand Stand / ground mount Cooling method Natural Cooling Power network configuration Efficiency Power meter AC power Input rating Rated frequency Output current 32 A / 16 A Output power 22 kW/ 11 kW/ 7.4 kW DLM function Storage temperature Operating temperature Operating humidity Altitude Electrical protection Dimensions mm 455 (h) x260 (w) x150 (d) Weight kg Stand OCPP 1.6J Full OCPP support, upgradable CE, TUV and full OCPP support, upgradable CE, TUV and full OCPP support, upgradable CE, TUV and full OCPP support TypeB (AC30mA + DC6mA) Mall oCPP support, upgradable CE, TUV and full OCPP support TypeB (AC30mA + DC6mA) Mall oCPP support TypeB (AC30mA + DC6mA) Available, not included Soling TN / TT -> (1P+N+PE) To year of included To year No year Altifum To year Indu Year Altifum	LED indicator	No		
Reports Standard and CE certificate CE, TUV and full OCPP support Leakage protection TypeB (AC30mA + DC6mA) Mounting Wall / Stand Stand / ground mount Cooling method Power network configuration Efficiency Power meter OCPP integrated AC power Input rating Rated frequency Output current 32 A / 16 A Output power OLPM function Storage temperature Operating temperature Operating temperature Operating humidity Altitude Electrical protection Dimensions mm A55 (h) x260 (w) x150 (d) Weight kg Stand full OCPP support, upgradable CE, TUV and full OCPP support TypeB (AC30mA + DC6mA) Mall OCPP support TypeB (AC30mA + DC6mA) Available, not included Natural Cooling TN / TT -> (1P+N+PE) To / TP /	Communication protocol	OCPP integrated		
Standard and CE certificate Leakage protection TypeB (AC30mA + DC6mA) Mounting Wall / Stand Stand / ground mount Cooling method Natural Cooling Power network configuration Efficiency Power meter OCPP integrated AC power Input rating Rated frequency Output current Output power 22 kW/ 11 kW/ 7.4 kW DLM function Storage temperature Operating temperature Operating humidity Altitude Electrical protection Dimensions mm 455 (h) x260 (w) x150 (d) Weight kg Stand / Ground Protection TypeB (AC30mA + DC6mA) Available, not included Story 17 -> (1P+N+PE) TypeB (AC30mA + DC6mA) Available, not included Story 17 -> (1P+N+PE) TypeB (AC30mA + DC6mA) Available, not included Story 17 -> (1P+N+PE) TypeB (AC30mA + DC6mA) TypeB (AC30mA + DC6mA) Available, not included Story 17 -> (1P+N+PE) TypeB (AC30mA + DC6mA) TypeB (AC10mA) Typ	Background functions	OCPP 1.6, OCPP 1.6J		
Leakage protection Mounting Wall / Stand Stand / ground mount Cooling method Power network configuration Efficiency Power meter OCPP integrated AC power Input rating Rated frequency Output current 32 A / 16 A Output power OLPM function Storage temperature Operating temperature Operating humidity Altitude Electrical protection Dimensions mm Vall / Stand Available, not included Available, T not included Storage Protection, Ground Protection, Over-Lemp Protection, Surge Protection Dimensions mm Ats (h) x260 (w) x150 (d) Weight kg Stand Available, CT not TypeB (AC30mA + DC6mA) Available, not included Natural Cooling TN / TT -> (1P+N+PE) Available, TN / TT -> (1P+N+PE) To (1P+	Reports	Full OCPP support, upgradable		
Mounting Wall / Stand Stand / ground mount Available, not included Cooling method Natural Cooling Power network configuration TN / TT → (3P+N+PE), TN / TT → (1P+N+PE) Efficiency >99% Power meter OCPP integrated AC power Input rating 3-phase 400V±20% / 1-phase 230V±20% Rated frequency 50/60 Hz Output current 32 A / 16 A Output power 22 kW/ 11 kW/ 7.4 kW DLM function Available, CT not included Storage temperature -40 to 75°C ambient Operating temperature -30 to 55°C ambient Operating humidity Up to 95% non-condensing Altitude ≤2000m Electrical protection Over/Under Voltage Protection, Over-Load Protection, Short Circuit Protection, Earth Leakage Protection, Ground Protection, Over-temp Protection, Surge Protection Dimensions mm 455 (h) x260 (w) x150 (d) Weight kg 5,9	Standard and CE certificate	CE, TUV and full OCPP support		
Stand / ground mount Cooling method Natural Cooling Power network configuration Efficiency Power meter OCPP integrated AC power Input rating Rated frequency Output current Output power DLM function Storage temperature Operating temperature Operating humidity Altitude Electrical protection Dimensions mm Vailable, not included Natural Cooling TN / TT -> (3P+N+PE), TN / TT -> (1P+N+PE) NATURE (1P	Leakage protection	TypeB (AC30mA + DC6mA)		
Cooling method Power network configuration Power network configuration TN / TT -> (3P+N+PE), TN / TT -> (1P+N+PE) Efficiency >99% Power meter OCPP integrated AC power Input rating 3-phase 400V±20% / 1-phase 230V±20% Rated frequency 50/60 Hz Output current 32 A / 16 A Output power 22 kW/ 11 kW/ 7.4 kW DLM function Available, CT not included Storage temperature -40 to 75°C ambient Operating temperature Operating humidity Up to 95% non-condensing Altitude Electrical protection Over/Under Voltage Protection, Over Load Protection, Short Circuit Protection, Earth Leakage Protection, Ground Protection, Over-temp Protection, Surge Protection Dimensions mm 455 (h) x260 (w) x150 (d) Weight kg 5,9	Mounting	Wall / Stand		
Power network configuration Efficiency >99% Power meter AC power Input rating Rated frequency Output current Output power 22 kW/ 11 kW/ 7.4 kW DLM function Storage temperature Operating humidity Altitude Electrical protection Dimensions mm Very 100 control of the control of	Stand / ground mount	Available, not included		
Power meter OCPP integrated AC power Input rating 3-phase 400V±20% / 1-phase 230V±20% Rated frequency 50/60 Hz Output current 32 A / 16 A Output power 22 kW/ 11 kW/ 7.4 kW DLM function Available, CT not included Storage temperature -40 to 75°C ambient Operating temperature Operating humidity Up to 95% non-condensing Altitude Electrical protection Over/Under Voltage Protection, Over Load Protection, Short Circuit Protection, Earth Leakage Protection, Ground Protection, Over-temp Protection, Surge Protection Dimensions mm 455 (h) x260 (w) x150 (d) Weight kg 5,9	Cooling method	Natural Cooling		
Power meter AC power Input rating 3-phase 400V±20% / 1-phase 230V±20% Rated frequency 50/60 Hz Output current 32 A / 16 A Output power 22 kW/ 11 kW/ 7.4 kW DLM function Available, CT not included Storage temperature -40 to 75°C ambient Operating temperature -30 to 55°C ambient Operating humidity Up to 95% non-condensing Altitude ≤2000m Electrical protection Over/Under Voltage Protection, Over Load Protection, Short Circuit Protection, Earth Leakage Protection, Ground Protection, Over-temp Protection, Surge Protection Dimensions mm 455 (h) x260 (w) x150 (d) Weight kg 5,9	Power network configuration	TN / TT -> (3P+N+PE), TN / TT -> (1P+N+PE)		
AC power Input rating 3-phase 400V±20% / 1-phase 230V±20% Rated frequency 50/60 Hz Output current 32 A / 16 A Output power 22 kW/ 11 kW/ 7.4 kW DLM function Available, CT not included Storage temperature -40 to 75°C ambient Operating temperature Operating humidity Up to 95% non-condensing Altitude ≤2000m Electrical protection Over/Under Voltage Protection, Over Load Protection, Short Circuit Protection, Earth Leakage Protection, Ground Protection, Over-temp Protection, Surge Protection Dimensions mm 455 (h) x260 (w) x150 (d) Weight kg 5,9	Efficiency	>99%		
Rated frequency 50/60 Hz Output current 32 A / 16 A Output power 22 kW/ 11 kW/ 7.4 kW DLM function Available, CT not included Storage temperature -40 to 75°C ambient Operating temperature -30 to 55°C ambient Operating humidity Up to 95% non-condensing Altitude ≤2000m Electrical protection Over/Under Voltage Protection, Over Load Protection, Short Circuit Protection, Earth Leakage Protection, Ground Protection, Over-temp Protection, Surge Protection Dimensions mm 455 (h) x260 (w) x150 (d) Weight kg 5,9	Power meter	OCPP integrated		
Output current 32 A / 16 A Output power 22 kW/ 11 kW/ 7.4 kW DLM function Available, CT not included Storage temperature -40 to 75°C ambient Operating temperature -30 to 55°C ambient Operating humidity Up to 95% non-condensing Altitude ≤2000m Electrical protection Over/Under Voltage Protection, Over Load Protection, Earth Leakage Protection, Ground Protection, Earth Leakage Protection, Ground Protection, Over-temp Protection, Surge Protection Dimensions mm 455 (h) x260 (w) x150 (d) Weight kg 5,9	AC power Input rating	3-phase 400V±20% / 1-phase 230V±20%		
Output power 22 kW/ 11 kW/ 7.4 kW DLM function Available, CT not included Storage temperature -40 to 75°C ambient Operating temperature -30 to 55°C ambient Operating humidity Up to 95% non-condensing Altitude ≤2000m Electrical protection Over/Under Voltage Protection, Over Load Protection, Short Circuit Protection, Earth Leakage Protection, Ground Protection, Over-temp Protection, Surge Protection Dimensions mm 455 (h) x260 (w) x150 (d) Weight kg 5,9	Rated frequency	50/60 Hz		
DLM function Available, CT not included Storage temperature -40 to 75°C ambient Operating temperature -30 to 55°C ambient Operating humidity Up to 95% non-condensing Altitude ≤2000m Electrical protection Over/Under Voltage Protection, Over Load Protection, Short Circuit Protection, Earth Leakage Protection, Ground Protection, Over-temp Protection, Surge Protection Dimensions mm 455 (h) x260 (w) x150 (d) Weight kg 5,9	Output current	32 A / 16 A		
Storage temperature Operating temperature Operating humidity Altitude Electrical protection Over Load Protection, Short Circuit Protection, Earth Leakage Protection, Ground Protection, Over-temp Protection, Surge Protection Dimensions mm Over Load Protection (Weight kg) Dimensions mm Over Load Protection, Surge Protection, Ground Protection, Surge Protection	Output power	22 kW/ 11 kW/ 7.4 kW		
Operating temperature Operating humidity Up to 95% non-condensing Altitude ≤2000m Electrical protection Over/Under Voltage Protection, Over Load Protection, Short Circuit Protection, Earth Leakage Protection, Ground Protection, Over-temp Protection, Surge Protection Dimensions mm 455 (h) x260 (w) x150 (d) Weight kg 5,9	DLM function	Available, CT not included		
Operating humidity Up to 95% non-condensing Altitude ≤2000m Electrical protection Over/Under Voltage Protection, Over Load Protection, Short Circuit Protection, Earth Leakage Protection, Ground Protection, Over-temp Protection, Surge Protection Dimensions mm 455 (h) x260 (w) x150 (d) Weight kg 5,9	Storage temperature	-40 to 75°C ambient		
Altitude ≤2000m Electrical protection Over/Under Voltage Protection, Over Load Protection, Short Circuit Protection, Earth Leakage Protection, Ground Protection, Over-temp Protection, Surge Protection Dimensions mm 455 (h) x260 (w) x150 (d) Weight kg 5,9	Operating temperature	-30 to 55°C ambient		
Electrical protection Over/Under Voltage Protection, Over Load Protection, Short Circuit Protection, Earth Leakage Protection, Ground Protection, Over-temp Protection, Surge Protection Dimensions mm 455 (h) x260 (w) x150 (d) Weight kg 5,9	Operating humidity	Up to 95% non-condensing		
Over Load Protection, Short Circuit Protection, Earth Leakage Protection, Ground Protection, Over-temp Protection, Surge Protection Dimensions mm 455 (h) x260 (w) x150 (d) Weight kg 5,9	Altitude	≤2000m		
Weight kg 5,9	Electrical protection	Over Load Protection, Short Circuit Protection, Earth Leakage Protection, Ground Protection, Over-temp		
	Dimensions mm	455 (h) x260 (w) x150 (d)		
Warranty 24 months	Weight kg	5,9		
	Warranty	24 months		

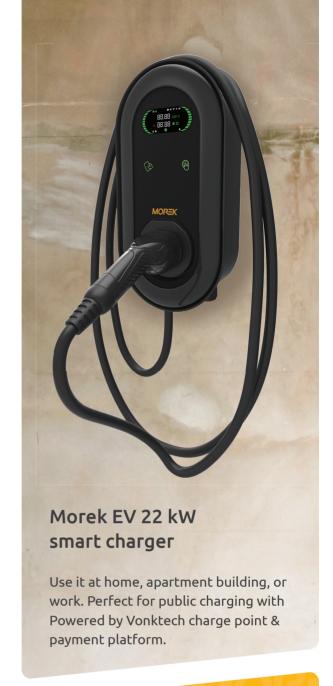



Creating a better future for You

- EV 22 kW network charger
- 3.8" LCD display
- WiFi, RFID
- Type 2 socket

Product ID	MEV22DREWNT2		
Charging mode	Level 2		
Connector type	Type 2 socket		
Charging control	Plug-and-Charge, Start/stop touch button,		
	RFID Card, Configuration BT APP, Web app		
Internet connection	Wi-Fi / LAN		
External communication	RS485		
IP protection	IP55		
Impact strength	IK08		
Display	LCD 3.8"		
LED indicator	No		
Communication protocol	OCPP integrated		
Background functions	OCPP 1.6, OCPP 1.6J		
Reports	Full OCPP support, upgradable		
Standard and CE certificate	CE, TUV and full OCPP support		
Leakage protection	TypeB (AC30mA + DC6mA)		
Mounting	Wall / Stand		
Stand / ground mount	Available, not included		
Cooling method	Natural Cooling		
Power network configuration	TN / TT -> (3P+N+PE), TN / TT -> (1P+N+PE)		
Efficiency	>99%		
Power meter	OCPP integrated		
AC power Input rating	3-phase 400V±20% / 1-phase 230V±20%		
Rated frequency	50/60 Hz		
Output current	32 A / 16 A		
Output power	22 kW/ 11 kW/ 7.4 kW		
DLM function	Available, CT not included		
Storage temperature	-40 to 75°C ambient		
Operating temperature	-30 to 55°C ambient		
Operating humidity	Up to 95% non-condensing		
Altitude	≤2000m		
Electrical protection	Over/Under Voltage Protection, Over Load Protection, Short Circuit Protection, Earth Leakage Protection, Ground Protection, Over-temp Protection, Surge Protection		
Dimensions mm	455 (h) x260 (w) x150 (d)		
Weight kg	2,5		
Warranty	24 months		








- EV 7,4 kW charger
- LED indicator
- 5m cable
- Type 2 connector


Product ID	MEV07NNNN5T2		
Charging mode	Level 2		
Connector type	Type 2 connector with 5m cable		
Charging control	Plug-and-Charge		
Internet connection	No		
External communication	RS485		
IP protection	IP55		
Impact strength	IK10		
Display	No		
LED indicator	LED color indicators		
Communication protocol	-		
Background functions	-		
Reports	-		
Standard and CE certificate	CE, TUV		
Leakage protection	TypeB (AC30mB + DC6mA)		
Mounting	Wall / Stand		
Stand / ground mount	Available, not included		
Cooling method	Natural Cooling		
Power network configuration	TN / TT -> (3P+N+PE), TN / TT -> (1P+N+PE)		
Efficiency	>99%		
Power meter	No		
AC power Input rating	1-phase 230V±20%		
Rated frequency	50/60 Hz		
Output current	32 A / 16 A		
Output power	7.4 kW		
DLM function	Available, CT not included		
Storage temperature	-40 to 75°C ambient		
Operating temperature	-30 to 55°C ambient		
Operating humidity	Up to 95% non-condensing		
Altitude	≤2000m		
Electrical protection	Over/Under Voltage Protection, Over Load Protection, Short Circuit Protection, Earth Leakage Protection, Ground Protection, Over-temp Protection, Surge Protection		
Dimensions mm	455 (h) x260 (w) x150 (d)		
Weight kg	4,4		
Warranty	24 months		

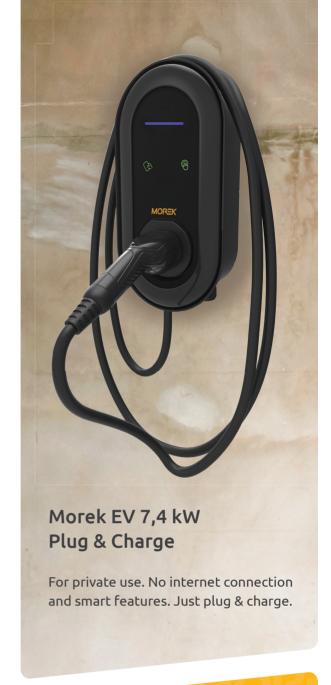



- EV 22 kW charger
- LED indicator
- 5m cable
- Type 2 connector

Product ID	MEV22NNNN5T2		
Charging mode	Level 2		
Connector type	Type 2 connector with 5m cable		
Charging control	Plug-and-Charge		
Internet connection	No		
External communication	RS485		
IP protection	IP55		
Impact strength	IK10		
Display	No		
LED indicator	LED color indicators		
Communication protocol	-		
Background functions	-		
Reports	-		
Standard and CE certificate	CE, TUV		
Leakage protection	TypeB (AC30mA + DC6mA)		
Mounting	Wall / Stand		
Stand / ground mount	Available, not included		
Cooling method	Natural Cooling		
Power network configuration	TN / TT -> (3P+N+PE), TN / TT -> (1P+N+PE)		
Efficiency	>99%		
Power meter	No		
AC power Input rating	3-phase 400V±20% / 1-phase 230V±20%		
Rated frequency	50/60 Hz		
Output current	32 A / 16 A		
Output power	22 kW/ 11 kW/ 7.4 kW		
DLM function	Available, CT not included		
Storage temperature	-40 to 75°C ambient		
Operating temperature	-30 to 55°C ambient		
Operating humidity	Up to 95% non-condensing		
Altitude	≤2000m		
Electrical protection	Over/Under Voltage Protection, Over Load Protection, Short Circuit Protection, Earth Leakage Protection, Ground Protection, Over-temp Protection, Surge Protection		
Dimensions mm	455 (h) x260 (w) x150 (d)		
Weight kg	5,9		
Warranty	24 months		

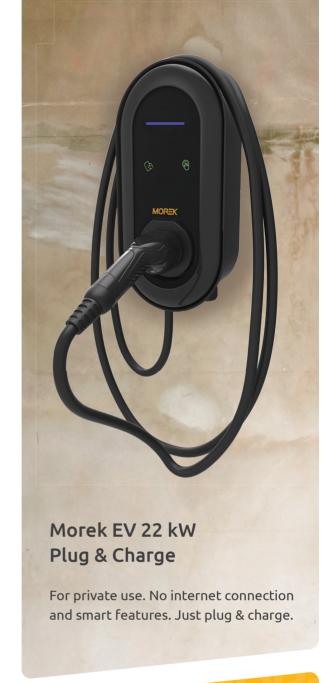

















Smart charger

Plug & Charge charger

		T	T		I	
	11 kW	22 kW	22 kW	22 kW	7,4 kW	
Product ID	MEV11DRNW5T2	MEV22DREW5T2	MEV22DREWNT2	MEV22NNNN5T2	MEV07NNNN5T2	
Weight kg	4,5	5,9	2,5	5,9	4,4	
Charging mode		ı	Level 2			
Connector type	Type 2 conne	ctor with 5m cable o	or socket	Type 2 connector w	vith 5m cable	
Charging control	Plug-and-Ch	arge, Start/stop tou	ch button,	Plug-and-Charge		
	RFID Card, C	onfiguration BT APF	, Web app			
Internet connection	Wi-Fi / LAN			No		
External communication	RS485			-		
IP protection			IP55			
Impact strength	IK08			IK10		
Display	LCD 3.8"			No		
LED indicator	No	No			LED color indicators	
Communication protocol	OCPP integr	OCPP integrated			-	
Background functions	OCPP 1.6, OC	OCPP 1.6, OCPP 1.6J				
Reports	Full OCPP su	Full OCPP support, upgradable			-	
Standard and CE certificate	CE, TUV and full OCPP support CE, TUV					
Leakage protection		T	ypeB (AC30mA + DC6r	mA)		
Mounting	Wall / Stand					
Stand / ground mount		Available, not included				
Cooling method	Natural Cooling					
Power network configuration		TN/TT ->	(3P+N+PE), TN / TT ->	(1P+N+PE)		
Efficiency			>99%			
Power meter	OCPP integr	OCPP integrated No				
AC power Input rating		3-phase 400V±20% / 1-phase 2			1-phase 230V±20%	
Rated frequency		50/60 Hz				
Output current	32 A / 16 A					
Output power	11 / 7.4 kW	22 / 11 / 7.4 kW	22 / 11 / 7.4 kW	22 / 11 / 7.4 kW	7.4 kW	
DLM function	Available, CT not included					
Storage temperature	-40 to 75°C ambient					
Operating temperature	-30 to 55°C ambient					
Operating humidity	Up to 95% non-condensing					
Altitude		≤2000m				
Electrical protection	Over/Under Voltage Protection, Over Load Protection, Short Circuit					
	Protection, Earth Leakage Protection, Ground Protection, Over-temp					
		Pr	Protection, Surge Protection			
Dimensions mm	455 (h) x260 (w) x150 (d)					
Warranty			24 months			

Creating a better future for You



Worry-free charging for homes, workplaces, and businesses. From its durable and weatherproof design to its integrated electrical protection, our EV charging wallbox is reliable in every situation.

With built-in Wi-Fi, Ethernet, and optional 4G, it's always connected so you can track and manage your charging stations, receive remote updates, and earn revenue.


An agile e-mobility system, as you need it

More than just a charging station, Morek EV charging wallbox. Use it with intuitive and easy—to—use charging management system. Simplicity, speed and clarity. No APP, no registration — everyone can charge right now, including aliens. Just scan QR-code, pay and charge — Powered by Vonktech charge point & payment platform.

- Quick and affordable deployment
- All locations in one system
- No end-user app download
- No end-user account registration
- Support



← Just Scan 'n Charge!

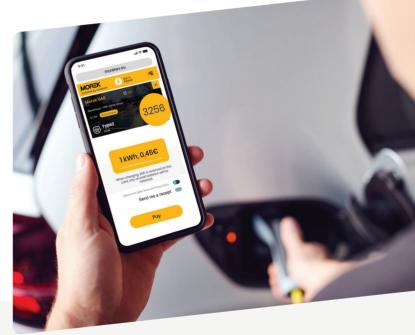

Smart, safe and durable.

Morek EV charging wallbox offers an effortless charging experience. Its simple design and smart function make electric vehicle charging and installation easier than ever before.

Installation preferences by location possibilities.

Load balancing solution safely balances the energy usage between a charging station and other on-site appliances.

External MID meter connected through RS485 provides more precise metering, complying with the most demanding billing requirements.

Easy to install

Network connection via LAN or WiFi

Intelligent charger suitable for every electric car

Simple load management (DLM) capability



With informative 3.8" LCD display and 5m cable

Ready to connect with background systems

Smart charging with an APP or RFID card



Not just for private use

Find a suitable model and service for an apartment building, parking lot, commercial building, etc

Start your EV charging journey in the best way possible

Questions? Make us work harder! More information about Morek EV chargers and discussions about EV user cases can be found from ev.morek.eu

